

DR3051S-DP

Differential Pressure Transmitter



Introduction


Differential Pressure Transmitter (DP)

- Measured media: gas, steam, liquid
- Measured range(with no shift):
0mbar~1mbar...30bar
- Basic error: $\pm 0.075\%$
- Diaphragm contacting with liquid: Stainless Steel 316L, Hast-alloy C

Features

- The central sensing element of transmitter uses the world's leading high- Accuracy silicon sensor technology, Basic error is $\pm 0.075\%$
- Working pressure of transmitter has three levels--160bar, 250bar and 400bar, the highest one-way overpressure is 400bar
- Excellent static pressure performance, optimal static pressure error $\leq \pm 0.1\%/100\text{bar}$
- The inner of pressure sensor integrates high sensitive temperature sensor
- Excellent temperature performance, optimum $\pm (0.20 \times \text{TD} + 0.10)\% \times \text{Span}$ $-20^\circ\text{C} \sim 65^\circ\text{C}$
- All stainless steel 316L, silicone oil filling with welded sealing construction
- Stable and reliable, optimal long-term drift performance: $\pm 0.1\%/\text{year}$, 5-year maintenance-free
- Wide measured range: 1mbar~30bar
- Max. 100:1 pressure range proportion adjustable
- EMC conforms to GB/T 18268.1-2008 standard

Working Principle

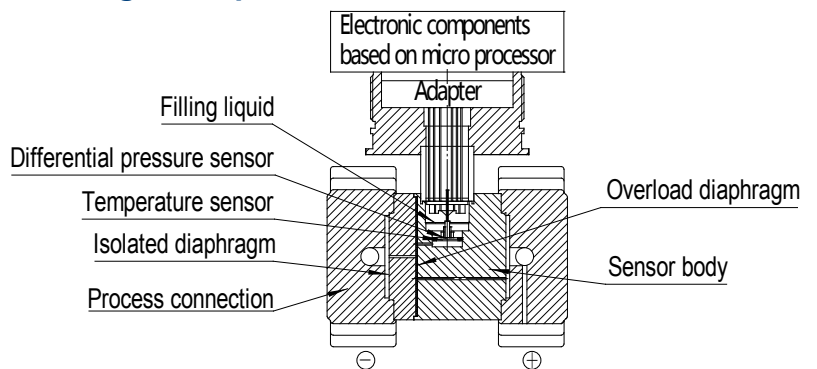

Differential pressure transmitter includes two functional units:

*Main unit

*Auxiliary unit

Main unit includes sensor and process connection, working principle as followed:

The sensor module uses whole welded technology, in which has a compact overload diaphragm, a differential pressure sensor and a temperature sensor. The temperature is taken as a reference for temperature compensation. The positive end of the differential pressure sensor is connected with high pressure chamber of sensor capsule; the negative end is connected with low pressure chamber of sensor capsule. Through the isolated diaphragm and filling liquid, the differential pressure is transmitted to silicon die in the inner of differential pressure sensor, which makes the resistor of sensor die change. So the detection system outputs different voltage. The output voltage is in proportion to the pressure variation, and then it is transmitted to standard output by adapter and amplifier.

Differential Pressure Transmitter (DP)

MDM3051S-DP Differential Pressure Transmitter is used for level, density, pressure and flow measurement of liquid, gas and steam. Then it will output 4mA~20mA DC HART signal and also it could be connected to MS-HART375 hand communicator or RSM295 Modem to do the specification setting and process control.

Standard Specification

(Standard zero as the reference calibration range, Stainless steel 316L diaphragm, filling liquid is silicone oil)

Performance Specification

Reference Basic error for range calibration(including linearity, hysteresis and repeatability from zero):

$\pm 0.075\%$

If $TD > 10$ ($TD = \text{Max. Pressure range/calibration range}$), the Basic error is $\pm(0.0075 \times TD)\%$

The Basic error of square root output is 1.5 times of above reference Basic error.

Environmental Temperature Effect

Range Code	-20°C ~65°C Total effect value
A	$\pm(0.45 \times TD + 0.25)\% \times \text{Span}$
B	$\pm(0.30 \times TD + 0.20)\% \times \text{Span}$
C/D/F	$\pm(0.20 \times TD + 0.10)\% \times \text{Span}$

Range Code	-40~-20°C , 65°C ~85°C Total effect value
A	$\pm(0.45 \times TD + 0.25)\% \times \text{Span}$
B	$\pm(0.30 \times TD + 0.20)\% \times \text{Span}$
C/D/F	$\pm(0.20 \times TD + 0.10)\% \times \text{Span}$

Over range effect: $\pm 0.075\% \times \text{Span}$

Static pressure effect

Range Code	Effect value
A	$\pm(0.5\% \text{Span})/40\text{bar}$
B	$\pm(0.3\% \text{Span})/100\text{bar}$
C/D/F	$\pm(0.1\% \text{Span})/100\text{bar}$

Overpressure effect

Range Code	Effect value
A	$\pm 0.5\% \times \text{Span}/40\text{bar}$
B	$\pm 0.2\% \times \text{Span}/160\text{bar}$
C/D/F	$\pm 0.1\% \times \text{Span}/160\text{bar}$

Long-term stability

Range Code	Effect value
A	$\pm 0.5\% \times \text{Span}/1 \text{ year}$
B	$\pm 0.2\% \times \text{Span}/1 \text{ year}$
C/D/F	$\pm 0.1\% \times \text{Span}/1 \text{ year}$

Power effect $\pm 0.001\% / 10\text{V}$ (12V~42V DC), negligible.

Functional Specification

Standard Specification

Range/Limits		mbar
A	range	1~10
	limits	-10~10
B	range	2~60
	limits	-60~60
C	range	4~400
	limits	-400~400
D	range	25~2500
	limits	-2500~2500
F	range	300~30000
	limits	-5000~30000

Pressure range limit

The pressure is adjustable within the upper and lower limit;

It is recommended to choose the range code with the lowest pressure range proportion to optimize the performance specification;

Zero setting

The zero and pressure range could be adjusted to any value within the measured rang in the table, only the calibrated range \geq Min. Range is valid;

Mounting position effect

The change of mounting position parallel to diaphragm could not influence the zero drift. If the angle between mounting position and diaphragm is over 90° , the zero drift is $<4\text{mbar}$ which could be calibrated by zero setting. No other effect on pressure range;

Output

2- wire, 4mA~20mA DC, HART communication protocol, linearity or square root output optional.

Output signal limit: $I_{\min}=3.9\text{mA}$, $I_{\max}=20.5\text{mA}$;

Response time

The damping constant of amplifier parts is 0.1s, time constant of sensor is 0.1s~1.6s, which is decided by the pressure range and pressure range ratio. The additional adjustable time constant is 0.1s~60s. The non-linearity output(eg. Square root output) is influenced by this function and could be calculated by it;

Warm-up time

$<15\text{s}$

Environmental temperature

$-40^\circ\text{C} \sim 85^\circ\text{C}$

With LCD display and viton sealing ring, the temperature is $-20^\circ\text{C} \sim 65^\circ\text{C}$;

Storage temperature/ transportation temperature

$-50^\circ\text{C} \sim 85^\circ\text{C}$;with LCD display: $-40^\circ\text{C} \sim 85^\circ\text{C}$;

Working pressure

Rated working pressure: 160bar, 250bar, 400bar

Static pressure limit

From 35mbar absolute pressure to rated pressure, protection pressure can be pressurized to both high and low side of transmitter; and it can be higher than 1.5 times of rated pressure.

One-way overpressure limit

One-way overpressure could reach the rated pressure

EMC

Please refer to next page "EMC table"

Installation

Power and load condition

Power supply:

24V DC, $R \leq (U_s - 12\text{V}) / I_{\max}$ (k Ω) $I_{\max}=23\text{mA}$

Max. Voltage supply: 42V DC

Min. Voltage supply: 12V DC, 15V DC(Backlit LCD display)

Digital communication load resistance range: 250 Ω ~600 Ω

Electrical Connection

M20 \times 1.5 cable sealing buckle, terminals are suitable for (0.5~2.5)mm 2 wire.

Process connection

NPT 1/4 and UNF 7/16" female at both sides of process connection flange

Physical Specification

Material

Measuring capsule: Stainless Steel 316L

Diaphragm: Stainless Steel 316L, Hast-alloy C

Process flange: Stainless steel 304

Nut and bolt: Stainless steel(A4)

Filling liquid: silicone oil

Sealing ring: NBR, FKM, PTFE

Transmitter housing: Aluminum alloy material, epoxy resin glue sprays on the surface

Housing sealing ring: NBR

Nameplate: Stainless steel 304

Weight

3.3kg(not including LCD display, mounting support and process connection)

Housing protection


IP67

EMC Table

Code	Test terms	Standard	Test condition	Performance degree
1	Radiated interference(housing)	GB/T 9254-2008 table5	30MHz~1000MHz	qualified
2	Transmission interference (DC power port)	GB/T 9254-2008 table1	0.15MHz~30MHz	qualified
3	ESD immunity	GB/T 17626.2-2006	4kV(contact) 8kV(air)	B
4	Radiofrequency electromagnetic field immunity	GB/T 17626.3-2006	10V/m (80MHz~1GHz)	A
5	Power frequency magnetic field immunity	GB/T 17626.8-2006	30A/m	A
6	EFT immunity	GB/T 17626.4-2008	2kV(5/50ns,5kHz)	B


Notes:

1. A degree: Performance is normal within the technical standard range during testing.
2. B degree: During, the function or performance is lowered or lost temporarily, but it could be recovered by itself. Actual operation state, storage and data will keep the same.

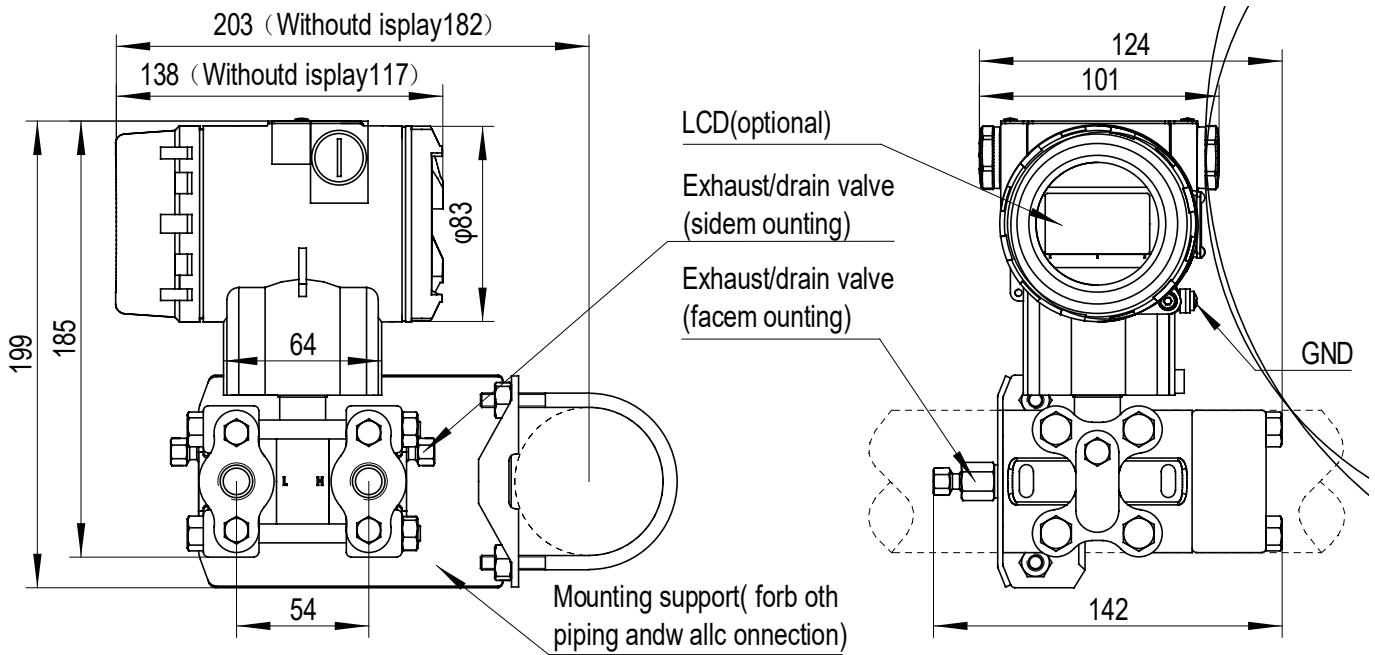
Outline Dimension(Unit: mm)

Horizontal Piping Installation (side view)

Horizontal Piping Installation (front view)

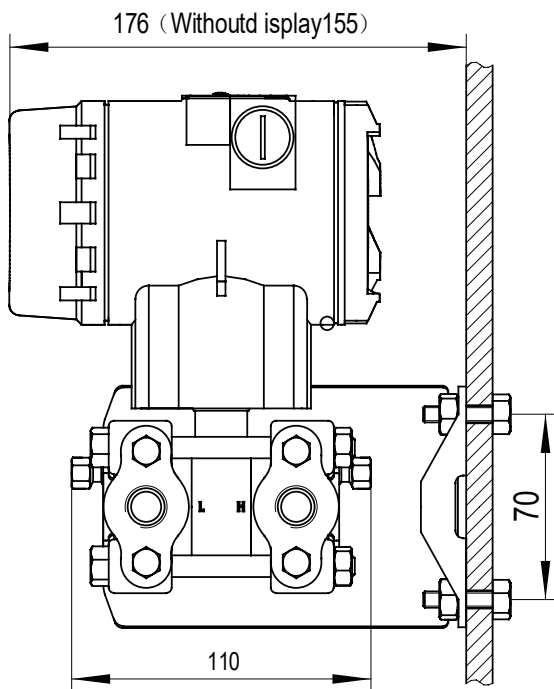


Wall Installation

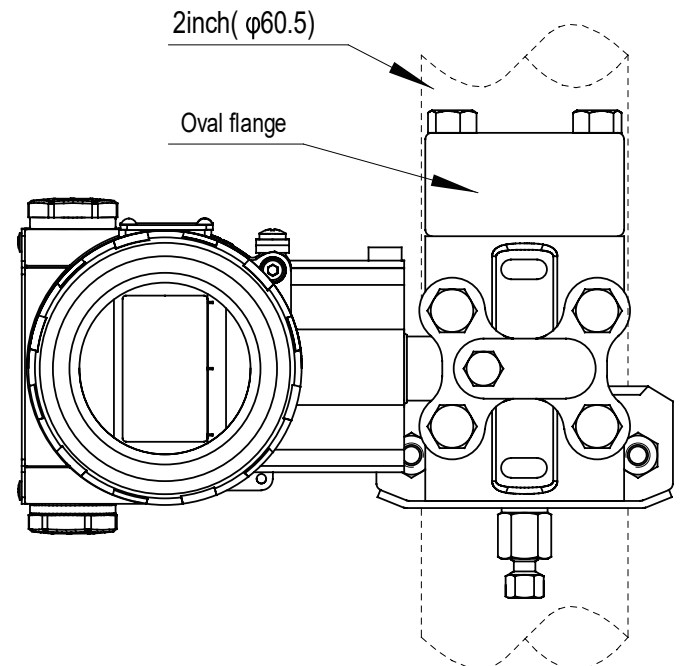

Vertical Piping Installation

Electrical connection

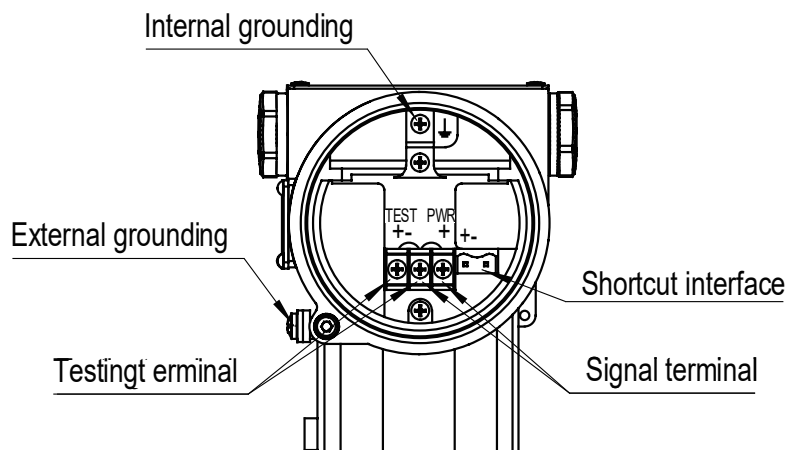


Note: the function of shortcut interface is equal to signal terminal.


Process connection instruction

Process flange joint


NPT1/2 Stainless steel oval flange(Code1)

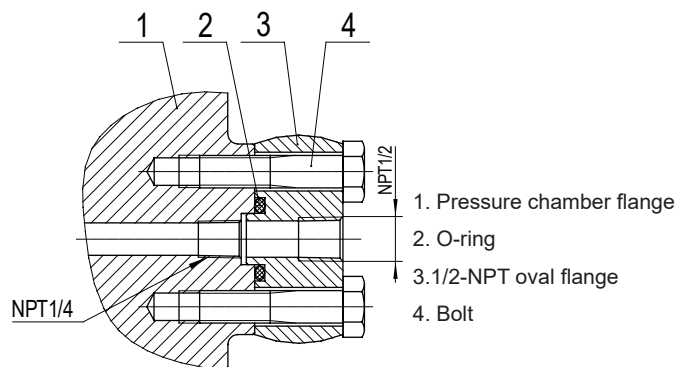

M20x1.5 Stainless steel T joint(Code2)

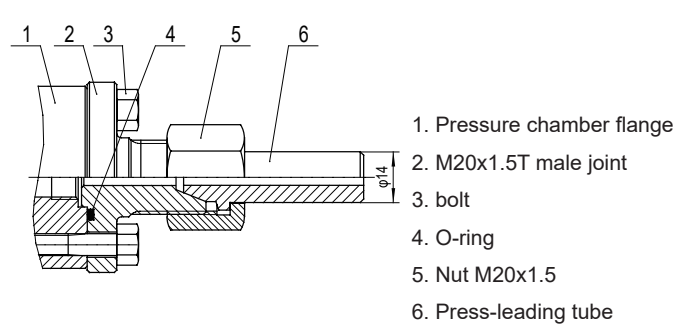

NPT1/2 male with bolts and pressure tube, SS304(Code3)

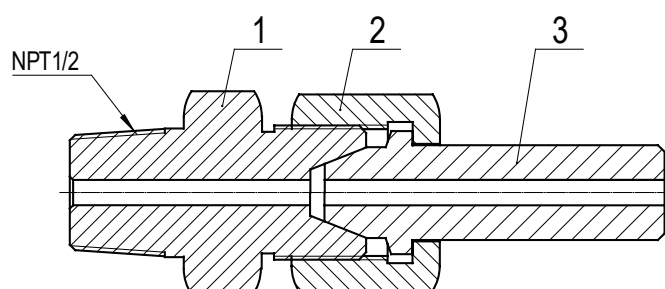

1. NPT1/2 and core connection joint
2. Nut M20x1.5
3. Pressure leading tube, welded, SS304

Order Guide

DR3051S-DP		Differential Pressure Transmitter																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															